



FUNG YUAN

Sincere / Innovation / Profession
Responsibility / Enthusiasm

L型全自動包裝機

F-510

Auto L-Type Packaging Machine



包裝範例 Samples



鋒源機械有限公司

FUNG YUAN MACHINERY CO., LTD.

公司：台中市豐原區圓環北路二段321號

工廠：台中市豐原區東北街187號

Office : No.321, Sec.2, Yuan Hwan North Rd., Feng Yuan Dist., 420 Taichung City, Taiwan

Factory : No.187, Tung Pei St., Feng Yuan Dist., Taichung, Taiwan

TEL : 886-4-25232986, 25227318, 25253217-8 FAX : 886-4-25276828

Http : //www.fungyuan.com E-mail : fungyuan@ms25.hinet.net



FUNG YUAN

Sincere / Innovation / Profession
Responsibility / Enthusiasm

L型全自動包裝機

F-510

Auto L-Type Packaging Machine

F-510 L型全自動包裝機 Auto L-Type Packaging Machine

特點:

- 最適合散裝物品及盒裝物品包裝—本機熱封使用對折收縮膜 (POF)，對禮品文具、玩具、藥品、食品、等最適合。
- 無煙恆溫熱封—本機採用獨特熱封方式，可免除因包裝膜具有鹽分產生煙味，確實得到最佳的包裝環境。
- 簡單的包裝方式—獨特設計，使對折包裝膜似模子自動撐開，把被包裝物快速簡單的送到供給輸送帶，完成包裝。
- 體積小，不佔地方—本機採用精巧的小型設計，機器安裝不佔空間。
- 移動方便。
- 封切刀有安全裝置。

Features :

- Most suitable for packing add goods and boxed goods.
- Smokeless heat sealing.
- Extremely simple packing processes.
- Small measurements for suving space.
- Easy movement.
- Sealing cutter has equipped with safety device.

F-510 / F-518 規格表 / F-510 / F-518 SPECIFICATION :

規格 SPECIFICATION	F-510#500	F-510	F-518#501	F-518#502
電壓源 Power / VHz	1PH / 110V / 220V	1PH / 110V / 220V	1PH / 110V / 220V	1PH / 110V / 220V
空壓源 Air Pressure / Kg/cm ² : Bar	5 ~ 6 Kg/cm ² : 6Bar	5 ~ 6 Kg/cm ² : 6Bar	5 ~ 6 Kg/cm ² : 6Bar	5 ~ 6 Kg/cm ² : 6Bar
耗電量 Power consumption / KW	1.5	2.0	2.0	3.0
封口刀尺寸 Sealing Bar / LxWxH mm	450 x 400 x 80	510 x 450 x 120	640 x 510 x 120~150	840 x 750 x 120~300
最小有效包裝尺寸 Min. Effective Packing size / LxWxH mm	100 x 40 x 5	100 x 50 x 5	100 x 60 x 5	120 x 120 x 5
最大有效包裝尺寸 Max. Effective Packing size / LxWxH mm	300 x 250 x 80	360 x 300 x 120	500 x 300 x 120	700 x 500 x 120
速度 Packing Speed / Packs/min	5 ~ 20	5 ~ 25	5 ~ 25	5 ~ 20
適用材料 Material	POF & PVC	POF & PVC	POF & PVC	POF & PVC
最大膠膜卷 Max. Film Reel / mm	350	500	600	800
機械尺寸 M/C Dimension / LxWxH mm	1650 x 760 x 1460	1720 x 900 x 1380	2050 x 1000 x 1580	2650 x 1600 x 1580
機械重量 M/C Weight / Kg	290	250	390	650

FPSB-M Series POF, PVC 收縮機 POF, PVC Shrink Tunnel

特點:

- 機械輕巧、不佔空間、使用方便。
- 不傷品質、節省電力、增加利潤。
- 熱縮爐熱輻射均勻，輸送以滾筒帶動，經久耐用，速度快慢由DC馬達控制調整。

Features :


- To assure the quality without being damaged, to save electricity and to increase profits.
- Heat oven for contracting will send out even heat radiation. Delivery is done by roller with durability. And the speed is controlled and driven by DC motor.

FPSB-M 系列規格表 / FPSB-M SERIES SPECIFICATION :

機型 Model	規格 Size	電壓源 Power Supply VHz	耗電量 Installed Power KW	有效包裝尺寸 Effective Packing Size (WxH) mm	速度 Average Output Speed (Meter / Min)	內爐尺寸 Inner Tunnel LxWxH (mm)	收縮爐尺寸 Overall LxWxH (mm)	機械重量 M/C Weight KG
FPSB - M4525		220V or 380/3PH/50-60	9	300 x 300 x 225	1-12 M	900 x 450 x 250	1500 x 650 x 1470	280
FPSB - M6030L		220V or 380/3PH/50-60	15	450 x 450 x 275	1-12 M	1200 x 600 x 300	1800 x 800 x 1520	330
FPSB - M7540LL		220V or 380/3PH/50-60	23	600 x 600 x 350	1-18 M	1500 x 750 x 400	2100 x 950 x 1620	400
FPSB - M9050LL		220V or 380/3PH/50-60	27	750 x 750 x 450	1-18 M	1500 x 1100 x 500	2100 x 1100 x 1720	480


機械外觀尺寸圖 / M/C Dim. Illustration 單位 / mm

FPSB-M4525 FPSB-M4525 SHRINKING MACHINE F-510 L型全自動包裝機 F-510 AUTO L-TYPE SEALING MACHINE

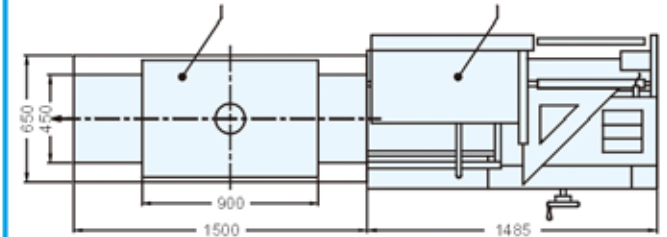

Only for Reference
(此圖僅供參考)

全自動包裝流程圖 / Packing Flow

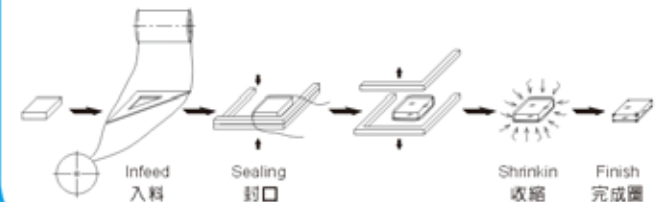

鋒源機械有限公司

FUNG YUAN MACHINERY CO., LTD.

公司：台中市豐原區圓環北路二段321號

工廠：台中市豐原區東北街187號

Office: No.321, Sec.2, Yuan Hwan North Rd., Feng Yuan Dist., 420 Taichung City, Taiwan

Factory: No.187, Tung Pei St., Feng Yuan Dist., Taichung, Taiwan

TEL : 886-4-25232986, 25227318, 25253217-8 FAX : 886-4-25276828

Http : //www.fungyuan.com E-mail : fungyuan@ms25.hinet.net